Security Clothes Hook
Front Mounted
Model No. 10-123

www.asijdmacdonald.com.au freecall 1800 023 441 Date: May 2016



SPECIFICATION
Front Mounted Security Clothes Hook Shall be fabricated of type 304 stainless steel alloy 18-8. Hook shall be solid bar 10mm diameter of one-piece construction with 25mm diameter swivel trip-ball and wall plate shall be 14 gauge. Wall plate shall have four (4) dimpled mounting holes for 1/4-20 flat head pin-Torx® machine screws (supplied). Safety hook shall snap down when load exceeds 16 kg limit. Trip-ball socket housing shall prevent hook from being set in vertical-up position. All exposed surfaces shall have No 4 satin finish.


INSTALLATION
Unit is front mounted to wall or partition using four (4) 1/4-20 x 2" (M6 x 50) flat head pin-Torx® machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). Anchors to be supplied by installer to suit wall condition.

OPERATION
Clothes hook is tensioned to release down when overloaded beyond the 16 kg limit.

WARRANTY
One year.

Security Clothes Hook shall be Model No 10-123 as supplied by ASI JD MacDonald.

All ASI JD MacDonald disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

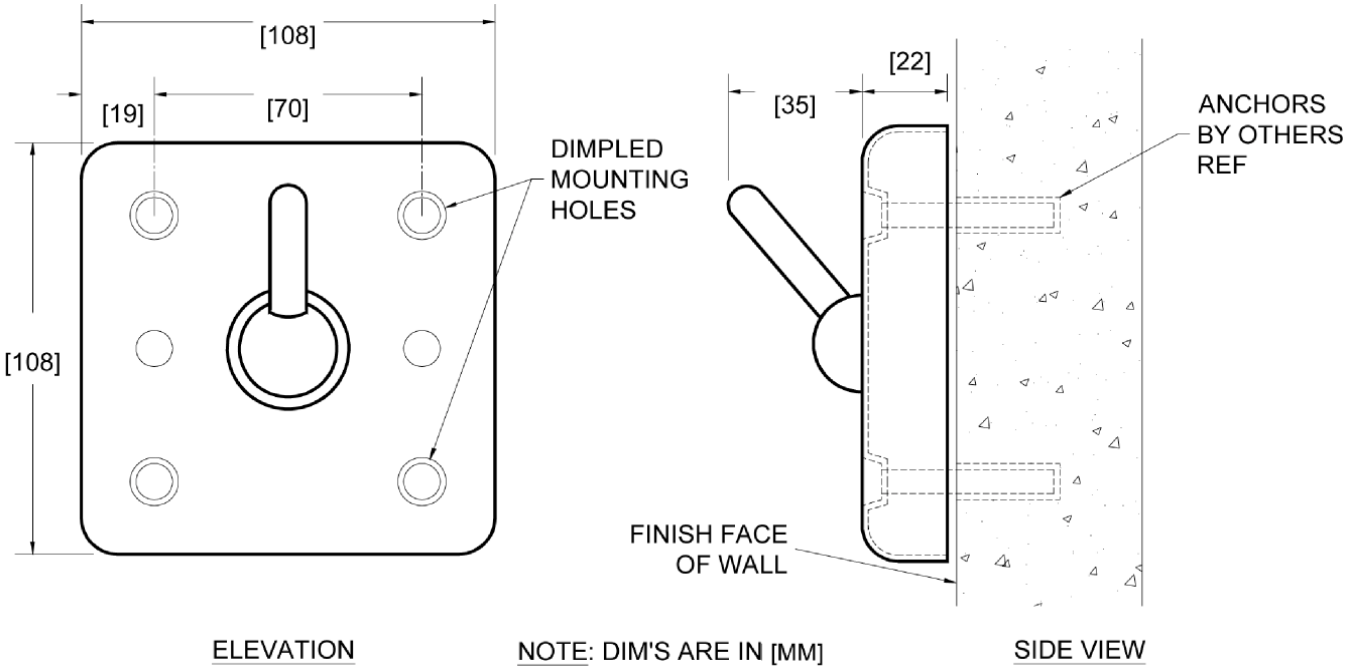

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres unless otherwise stated.