

- ✓ Clean water
- ✓ Domestic use
- ✓ Civil use
- ✓ Agricultural use



※ **Ready-to-install stainless steel submersible pump equipped with an integrated capacitor and thermal protector.**

※ **Patented hydraulics featuring fully independent, floating impellers, ensuring minimal impact from sand on pump performance.**

※ **These hydraulics have a minimum efficiency index (MEI) that far exceeds ErP requirements.**

※ **Outstanding performance .**

※ **Comes with a 20 m power cable.**

PERFORMANCE RANGE

- Flow rate up to 200 l/min (12 m³/h)
- Head up to **140m**

INSTALLATION AND USE

Designed to draw water from clean wells, even in the presence of sand (up to **200 g/m³**).


With their high efficiency, reliability, and ease of installation, they are highly recommended for domestic, commercial, and agricultural applications. They are ideal for automatic water distribution alongside pressure tanks, irrigation systems, and more.

APPLICATION LIMITS

- Liquid temperature up to **+35 °C**
- Maximum sand content **200 g/m³**
- Capable of operating at depths of up to **100 metres** below water level (with an appropriately sized power cable)
- Vertical and horizontal operation
- Starts per hour: **20** at regular intervals



PERFORMANCE RANGE

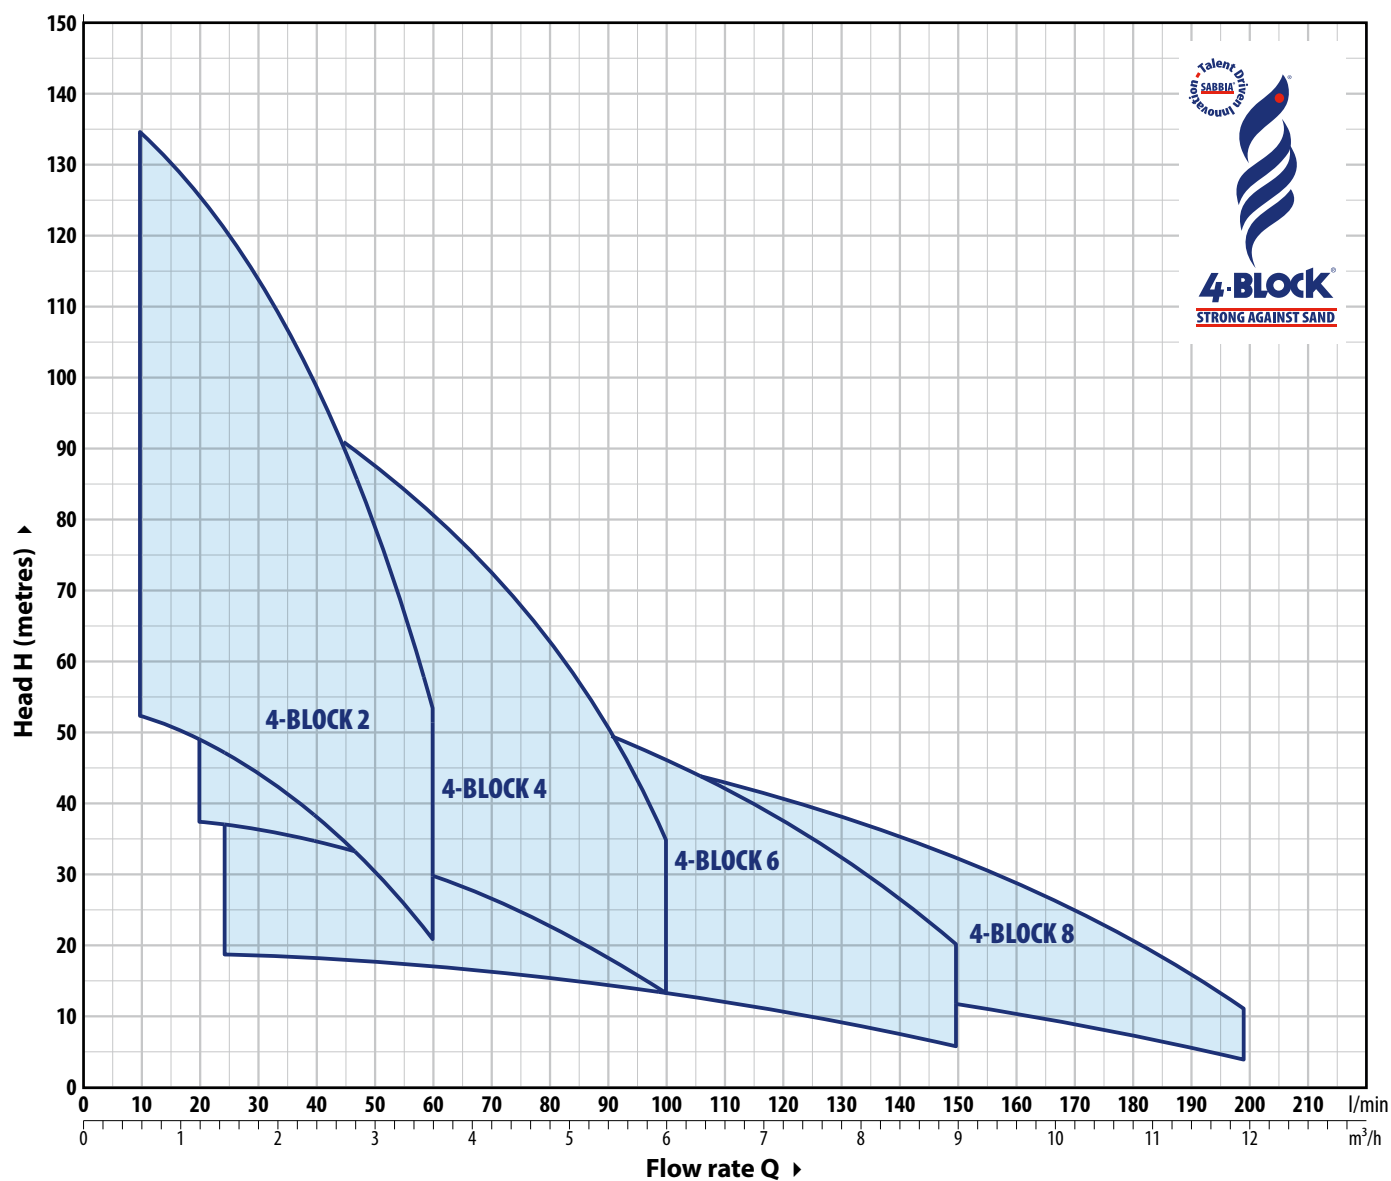

PATENTS - TRADE MARKS - MODELS

- European Patents No. EP3123031, EP2419642
- Patent No. 102021000030575
- **4-BLOCK®** is a registered trademark No. 018702380



Maxijet
 AUSTRALIA

1800 629 453
 03 9336 1000


sales@maxijet.com.au
 www.maxijet.com.au

Bringing Water to Life


PERFORMANCE RANGE

50 Hz

4-BLOCK 2

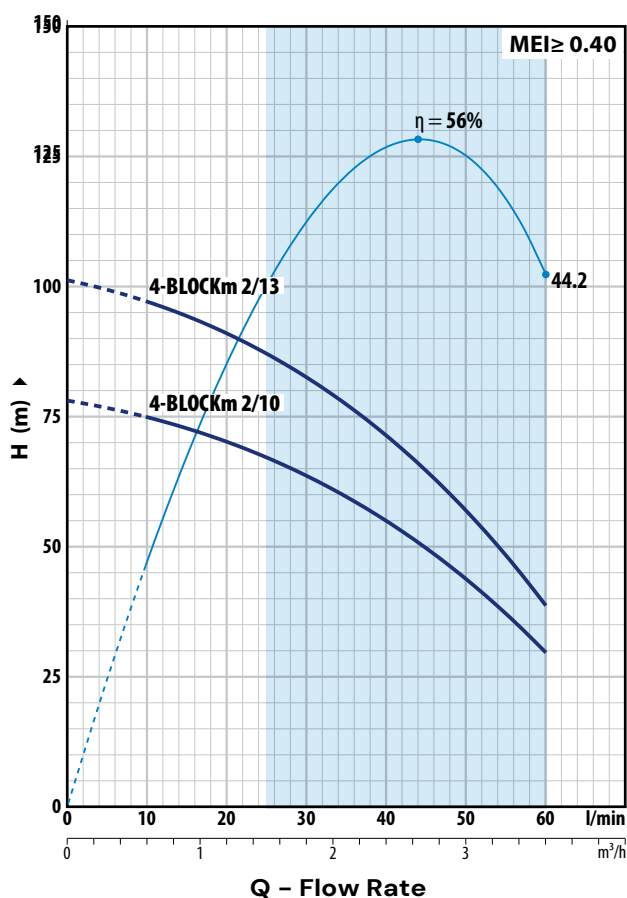

4-BLOCK 4

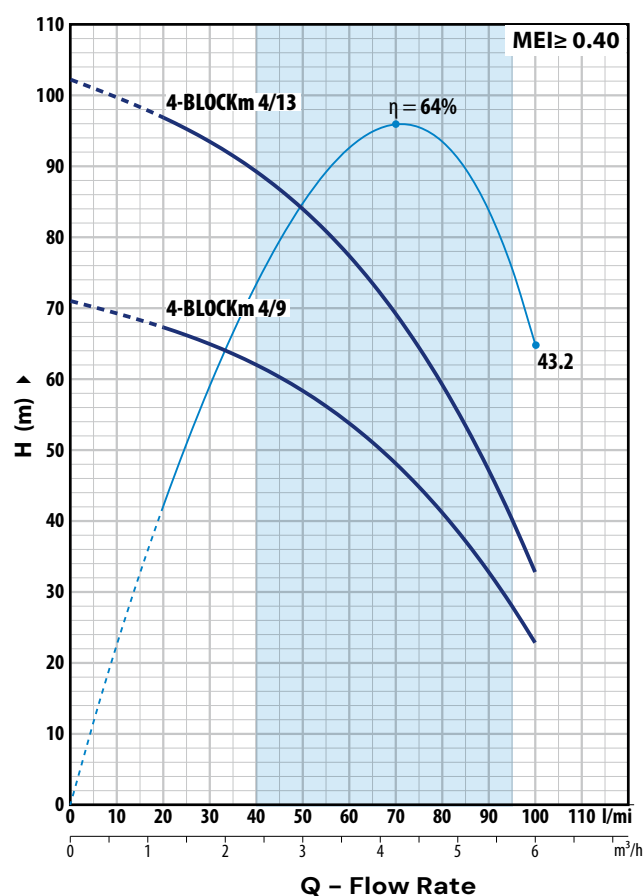

4-BLOCK 2

TYPE	POWER (P ₂)		Q m³/h l/min	0	0.6	1.2	1.8	2.4	3	3.6
Single-phase	kW	HP		0	10	20	30	40	50	60
4-BLOCKm 2/10	0.55	0.75	H metres	78	75	70	63.5	55	44	29.5
4-BLOCKm 2/13	0.75	1		101	97	91	83	71	57	38.5

4-BLOCK 4

TYPE	POWER (P ₂)		Q m³/h l/min	0	1.2	1.5	2.4	3.6	4.5	6
Single-phase	kW	HP		0	20	25	40	60	75	100
4-BLOCKm 4/9	0.75	1	H metres	71	67	66	62	53.5	44.5	22.5
4-BLOCKm 4/13	1.1	1.5		102	97	95	89	77	64.5	32.5

Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.



Maxijet
 AUSTRALIA


1800 629 453
 03 9336 1000

sales@maxijet.com.au
 www.maxijet.com.au

Bringing Water to Life


PERFORMANCE RANGE

4-BLOCK 6

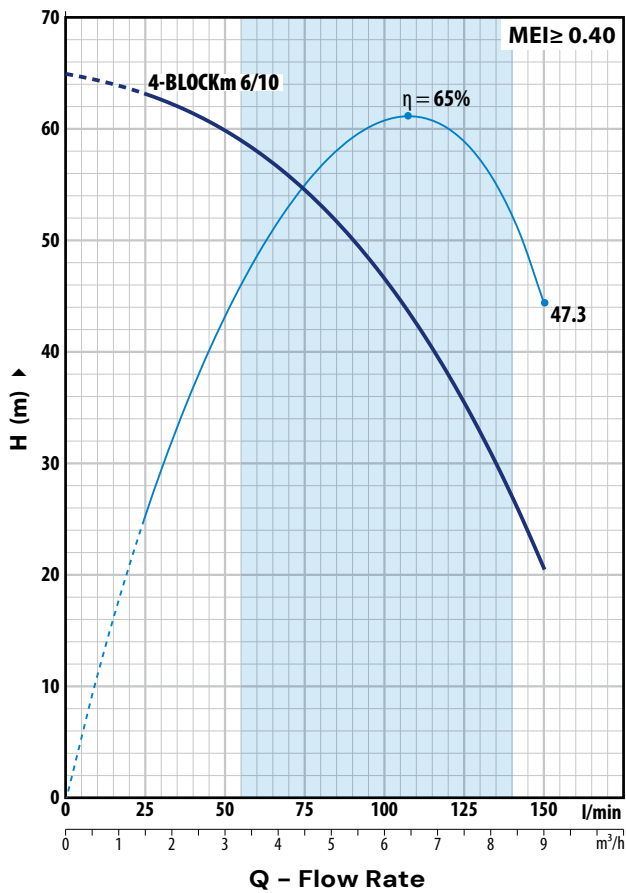

4-BLOCK 8

50 Hz

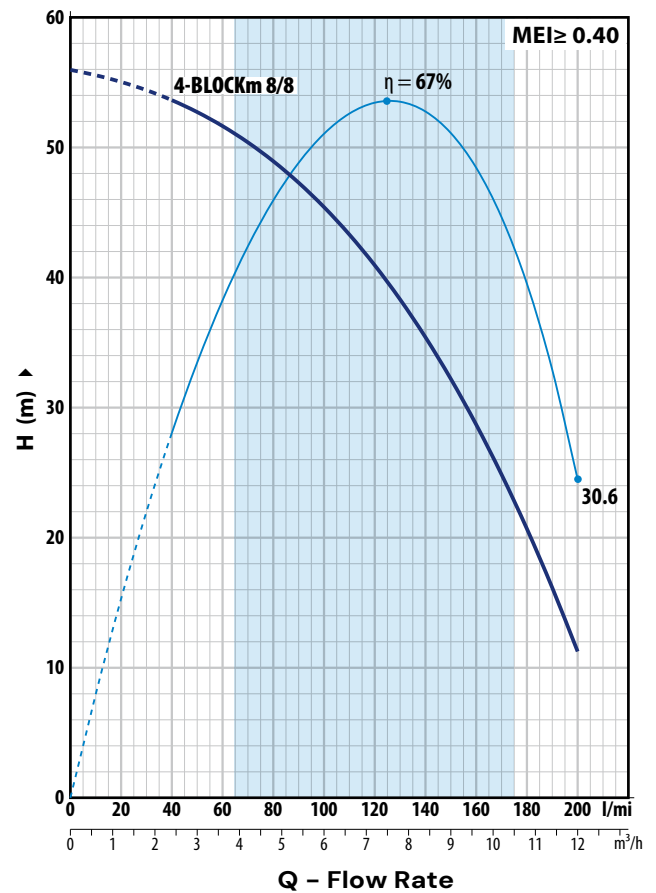

4-BLOCK 6

TYPE	POWER (P ₂)		Q	0	1.5	2.4	3.6	4.5	6.0	7.5	9.0
	kW	HP		0	25	40	60	75	100	125	150
4-BLOCKm 6/10	1.1	1.5	H metres	65	63	61.5	58	54.5	46.5	35.5	20.5

4-BLOCK 8

TYPE	POWER (P ₂)		Q	0	2.4	3.6	4.5	6.0	7.5	9.0	10.5	12
	kW	HP		0	40	60	75	100	125	150	175	200
4-BLOCKm 8/8	1.1	1.5	H metres	56	53.5	51.5	50	45.5	39.5	32.5	22.9	11.5

Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.



MATERIALS AND COMPONENTS

1 Delivery port and pump jacket Stainless steel **AISI 304** with thread according to ISO 228/1

2 Pump bearing EPDM

3 Impellers Delrin®

4 Diffusers Noryl™

5 Stadium boxes Stainless steel **AISI 304**

6 Pump shaft Stainless steel **AISI 304**

7 Cable sheath Stainless steel **AISI 304**

8 Filter Stainless steel **AISI 304**

9 Coupling motor bracket Technopolymer and brass

10 Motor shaft Stainless steel **AISI 431**

11 Motor sleeve Stainless steel **AISI 304**

12 Mechanical seal

Seal	Shaft	Materials
ST4-16	Ø 16 mm	Ceramic / Graphite / NBR

13 Capacitor

14 Electric motor


- Specially dimensioned submersible rewindable oil filled motor, suitable for continuous service (non-toxic food-safe oil).
- Single-phase 220-230 V - 50 Hz
- Built-in motor capacitor
- Thermal motor protection incorporated in the winding
- Continuous running duty S1
- Insulation: Class F
- Protection rating: IP X8

15 Compensating diaphragm

16 Power cord

➡ **DRINCABLE® HRC** certified for use with drinking water meant for human consumption by the **ACS** according to XP P 41-250, approval no. 18 MAT NY 156

Standard length **20 metres**

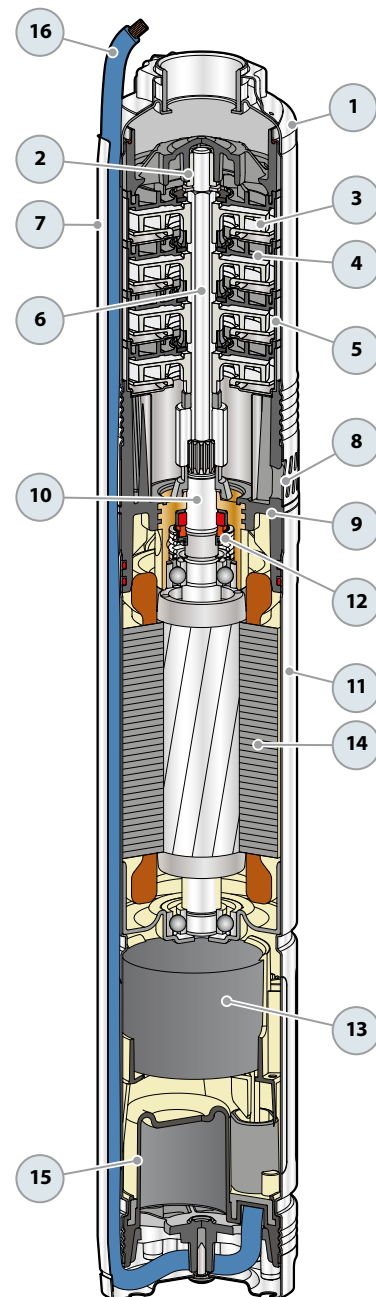

DIMENSIONS AND WEIGHT

TYPE	PORT	DIMENSIONS mm			kg
Single-phase	DN	NO. STAGES	Ø	h	1~
4-BLOCKm 2/13	1 1/4"	13	100	757	13.9
4-BLOCKm 2/18		18		907	17.0
4-BLOCKm 4/9		9		722	13.3
4-BLOCKm 4/13		13		872	16.4
4-BLOCKm 6/10		10		862	16.4
4-BLOCKm 8/8		8		799	15.8

ABSORPTION

TYPE	VOLTAGE
Single-phase	230 V
4-BLOCKm – 0.37 kW	3.5 A
4-BLOCKm – 0.55 kW	4.4 A
4-BLOCKm – 0.75 kW	6.1 A
4-BLOCKm – 1.1 kW	8.0 A

PALLET CAPACITY

TYPE	NO. OF PUMPS
Single-phase	
4-BLOCKm 2	55
4-BLOCKm 4	55
4-BLOCKm 6	55
4-BLOCKm 8	55

Typical installation

