✓ CLEAN WATER
✓ DOMESTIC USE

TECHNICAL DATA

TYPE Single-phase	P2 kW	P2 HP	Power supply Volt	Power supply Hz	Continuous duty current
EASYPRESS	1.5	2	230	50/60	13 A

OUT OF SERVICE
DRY RUNNING
FREQUENT START-UP

The **EASYPRESS** features 2 LED indicators to show the system's operating status and alerting to any issues through blinking patterns. A guide on the user in-terface helps to identify specific problems indicated by the LEDs.

PERFORMANCE RANGE

- Restart pressure: **1.5 bar**
- Maximum volume capacity: **170 l/min** (10 m3/h)

INSTALLATION AND USE

EASYPRESS is a durable and reliable electronic device de-signed to control and safeguard single-phase domestic pumps with a power capacity up to **2 HP**.

PRODUCT DESCRIPTION

- **EASYPRESS** features a pressure sensor and a flow sensor linked to an electronic system that automatically activates the pump when a faucet's opening lowers the pressure below a specified level and deactivates it when the flow stops or dips under 2 l/min.

- **The EASYPRESS** is equipped with:
  - Circuit board
  - Pressure Gauge
  - Integrated micro-accumulation enables operation even without an expansion tank, though the use of a **1SF tank is recommended**.

The integrated electronics protect the pump from:

- dry running
- frequent start-ups due to leaks in the system;
- lockout due to plant inactivity.

DIMENSIONS AND WEIGHT

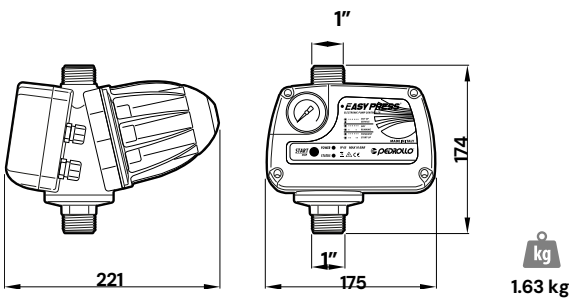

1.63 kg

APPLICATION LIMITS

- Liquid temperature up to **+55 °C**
- Ambient temperature up to **+40 °C**
- Maximum operating pressure **10 bar**
- Protection rating: **IP 65**

ACCESSORIES

- **GSR** Special three-piece coupling with o-ring seal (**1"**)

GSR

AVAILABLE UPON REQUEST

- **EASYPRESS** version with **0.8 bar** restart pressure
- **EASYPRESS** version with restart pressure **2.2 bar**
- Version with power cable with Schuko plug and motor pump connection cable

Maximum user height

Version **2.2 bar**
= 18 m

Version **1.5 bar**
= 11 m

Version **0.8 bar**
= 5 m
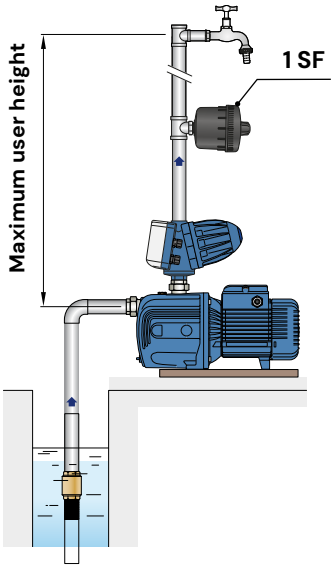
Typical installation