


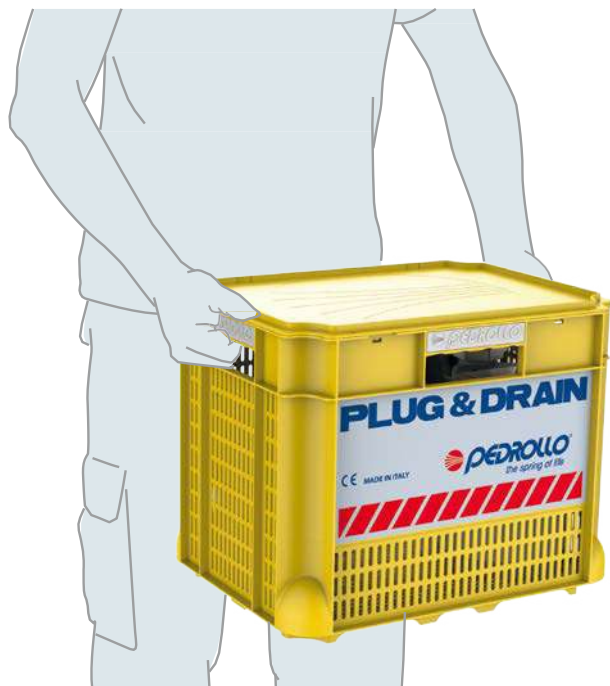

- **PLUG & DRAIN** is the essential emergency kit for fast and effective flood management in garages, basements, and cellars.
- Features a high-performance drainage pump and a 12.5-metre-long PVC hose for quick water evacuation, plus the option to

use the storage case as a filter.

- **PLUG & DRAIN** efficiently lowers water to just about 2 mm from the ground, ensuring nearly complete removal.
- Comes in a convenient carrying case that simplifies transport and doubles as a filter while you're draining.

PLUG & DRAIN Code. ASSKPDSTO2FA1

STANDARD COMPONENTS

SUBMERSIBLE Pump TOP2-FLOOR

- Single-phase 230 V - 50 Hz
- Performance:
 - H max= 8.5 m
 - Q max= 150 l/min
- 10 metre long power cable
- Float switch
- **STORZ'** quick coupling



PVC HOSE (Product not sold separately)

- **STORZ'** quick coupling
- Hose length 12.5 m
- Pipe diameter 1 1/4"



FILTER-BOX

- Features a secure pump attachment system for stable operation, with a quick-release option to use the pump independently.
- Includes a cover for tidy storage, ensuring it's always ready for immediate use





TECHNICAL SPECIFICATION

SPECIFICATIONS	Pump Type
	Pump Control
MATERIALS	Pump Body
	Impeller
PERFORMANCE	Mechanical seal
	Maximum depth of immersion
FITTINGS	Maximum size of suspended solids
	Pump connections
MOTOR ELECTRIC	Outlet port
	Typology
	Electric power supply
	Consumption
	CURRENT AT FULL LOAD
	Power Cord (pre-wired)
	Service Index

Series Model
Top 2 Floor

Submersible
Float
Techno polymer
Noryl
Ceramic/Graphite/NBR
3m
2mm
1 ¼" M
Asynchronous (with automatic reset thermal protector)
230V/50Hz
450W
2.0 A
10m
Continuous running duty (S1)

DIMENSIONS AND WEIGHT

TYPE	DIMENSIONS mm			kg*
	a	b	h	
PLUG & DRAIN - TOP 2-FLOOR	400	300	320	10.5

(* Total weight: pump, hose, fittings and box)

