



Series 1524

Zetco Bronze WaterMarked Y Strainer

DESCRIPTION

A high quality bronze Y strainer with female threads, WaterMarked to AS 3688 (Licence WM-022034) for use with potable water. The reinforced stainless steel 316 grade filter mesh ensures that debris can be captured and removed easily from the strainer to protect vital equipment and systems from damage or blockage.

FEATURES

Design	Body and cap in high quality corrosion-resistant bronze Stainless steel 316 mesh for added durability PTFE gasket for superior leak prevention Arrow on body to indicate flow direction
Production	Manufactured in Italy under ISO 9001 Quality Management System All strainers are pressure tested during production
Technical	Female ISO 7/1 Rp (BSP) threaded connections Mesh size: 500 microns (other sizes available on request) Temperature range: -10°C to 180°C Max. pressure: 2500 kPa (refer to graph)
Options & Variants	Size range: DN65 (2 1/2") to DN100 (4") Series 1524 Non-WaterMarked bronze Y strainer F&F DN15-50 Series 1504 WaterMarked DZR brass Y strainer F&F Series 1525 WaterMarked bronze Y strainer flanged Series 4060 WaterMarked Stainless steel Y strainer F&F Series 1020 WaterMarked combined ball valve and Y strainer

BIM-MED^{AUS}



WaterMark


IAPMO WM-022034
AS 3688

Series 1524

Zetco Bronze WaterMarked Y Strainer



DIMENSIONAL AND COMPONENT DIAGRAM

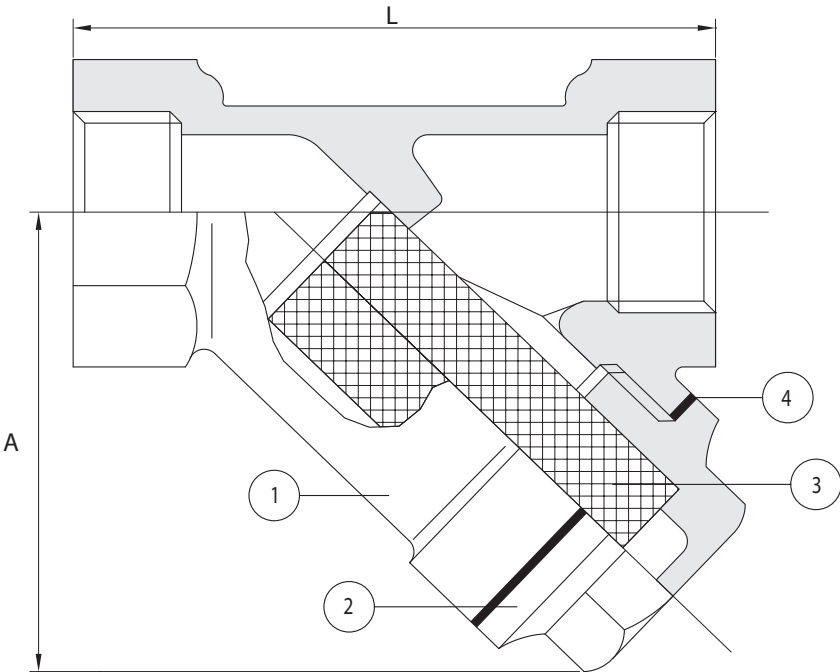

MATERIALS		
POS.	PART	MATERIAL
1	BODY	BRONZE
2	CAP	BRONZE
3	MESH	STAINLESS STEEL 316
4	O-RING	PTFE

DIMENSIONS (mm)						
Prod. Code	DN	Size - (mm)	A	L	Kv	Wgt Kg
1524065	65	2 1/2" - (63.5)	120	197	56	4.93
1524080	80	3" - (76.2)	151	235	80	7.69
1524100	100	4" - (101.6)	200	278	100	12.10

PRESSURE/TEMPERATURE GRAPH

