



Series 1707

WaterMarked Gate Valve F&F c/w Locking Mechanism

DESCRIPTION

Zetco's DN15 to D100 WaterMarked F&F gate valves can be supplied with a locking cover made of high performance thermoplastic alloy for superior chemical resistance at a wide range of temperatures. The cover features a provision for multiple padlocks for added security and the rotating design allows for easy operation in confined space.

FEATURES


Design	Available on Zetco DN15 to DN100 WaterMarked gate valves Locking cover surrounds the valve handle to prevent opening Lightweight XENOY™ thermoplastic alloy body provides good chemical resistance within a wide temperature range Rotating design for easy installation and operation in confined spaces Provision for multiple padlocks to be attached for added security High-visibility permanent rewritable safety label allows recording of last inspection date/person responsible
Production	Lockout device manufactured in USA
Technical	Temperature range of locking cover: -46°C to 177°C Refer to relevant specification sheet for gate valve details
Options & Variants	Series 1706 WaterMarked bronze gate valve BSP F&F Series 1736 WaterMarked bronze gate valve NPT threads Series 1719 WaterMarked bronze PN32 F&F gate valve Series 1714 WaterMarked bronze gate valve F&F, brass handwheel Series 1720 WaterMarked stainless heavy pattern gate valve F&F

Series 1707

WaterMarked Gate Valve F&F
c/w Locking Mechanism



DIMENSIONAL AND COMPONENT DIAGRAM

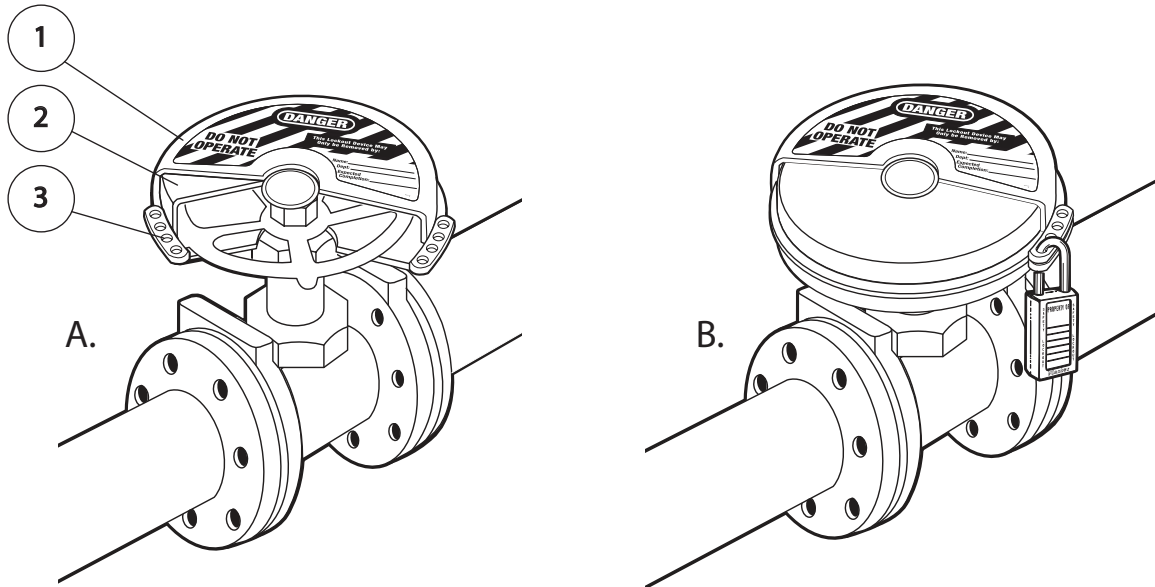

PARTS MATERIALS

POS.	PART	MATERIAL
1	OUTER COVER	XENYO®
2	INNER COVER	XENYO®
3	LOCKING EYELETS	N/A

Xenoy® is a registered trademark of General Electric Corporation

DIMENSIONS (mm)

Prod. Code	DN	Size - (mm)	WaterMarked Gate Valve
1707015	15	1/2" - (12.7)	Refer to series 1706, 1719, 1710
1707020	20	3/4" - (19.0)	Refer to series 1706, 1719, 1710
1707025	25	1" - (25.4)	Refer to series 1706, 1719, 1710
1707032	32	1 1/4" - (31.7)	Refer to series 1706, 1719, 1710
1707040	40	1 1/2" - (38.1)	Refer to series 1706, 1719, 1710
1707050	50	2" - (50.8)	Refer to series 1706, 1719, 1710
1707065	65	2 1/2" - (63.5)	Refer to series 1706, 1719, 1710
1707080	80	3" - (76.2)	Refer to series 1706, 1719, 1710
1707100	100	4" - (101.6)	Refer to series 1706, 1719, 1710

INSTALLATION

A	WITH INNER COVER ROTATED TO INSIDE OF OUTER COVER, PLACE LOCKOUT DEVICE OVER THE VALVE HANDLE AND ROTATE INNER COVER TO COMPLETELY ENCLOSE THE HANDLE
B	SECURE WITH PADLOCK BY INSERTING SHACKLE THROUGH THE OVERLAPPING LOCKING EYELETS