


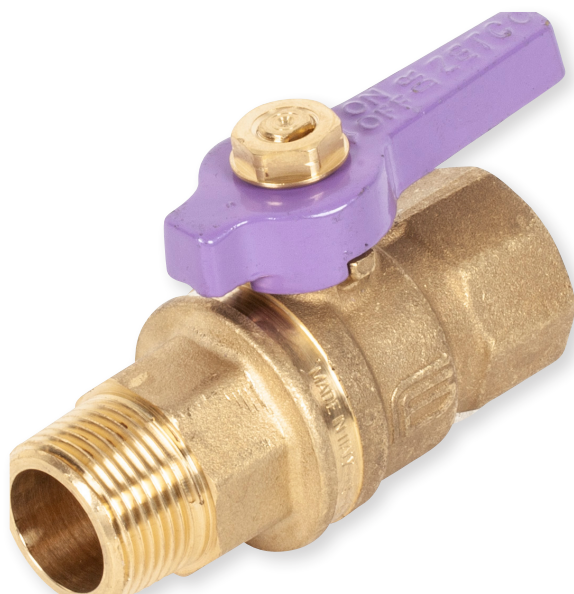

Series 1014

**Zetco WaterMarked
DZR Brass Ball Valve
M&F Lilac DZR Brass
T Handle & Nut**

DESCRIPTION

A high quality WaterMarked (to AS 4796, Licence WM-022133) male x female DZR brass ball valve with a DZR brass nut and lilac lever handle which visually identifies recycled water lines. The added internal corrosion resistance of a 316 grade stainless steel ball ensures a long and reliable service life in civil applications.

FEATURES

Design	Forged dezincification resistant brass body Lilac lever for visual identification of recycled water supplies DZR brass handle and nut to withstand challenging environments Stainless steel 316 grade ball for superior corrosion resistance PTFE ball seals for smooth, reliable operation Blow-out proof double o-ring stem sealing to prevent leakage
Production	Manufactured in Italy under ISO 9001 Quality Management System All valves are pressure tested during production
Technical	Female ISO 7/1 Rp (BSP) threaded connection Male ISO 7/1 R (BSP) threaded connection Flow control: on/off only, not intended for throttling Flow capacity: Full bore Temperature range: -20°C to 99°C Max. pressure: 2500 kPa (refer to graph)
Options & Variants	Size range: DN20 (3/4") to DN25 (1") Series 1013 WaterMarked DZR brass BSP F&F DZR nut & lilac lever Series 1012 WaterMarked DZR brass BSP M&F DZR lever & nut Series 1016 WaterMarked DZR brass BSP M&F lockable DZR lever & nut Series 1017 WaterMarked DZR brass BSP M&F mains tapping Series 1018 WaterMarked DZR brass BSP M&F lilac mains tapping



WaterMark


IAPMO WM-022133
AS 4796

Series 1014

Zetco WaterMarked DZR Brass Ball Valve
M&F Lilac DZR Brass T Handle & Nut



DIMENSIONAL AND COMPONENT DIAGRAM

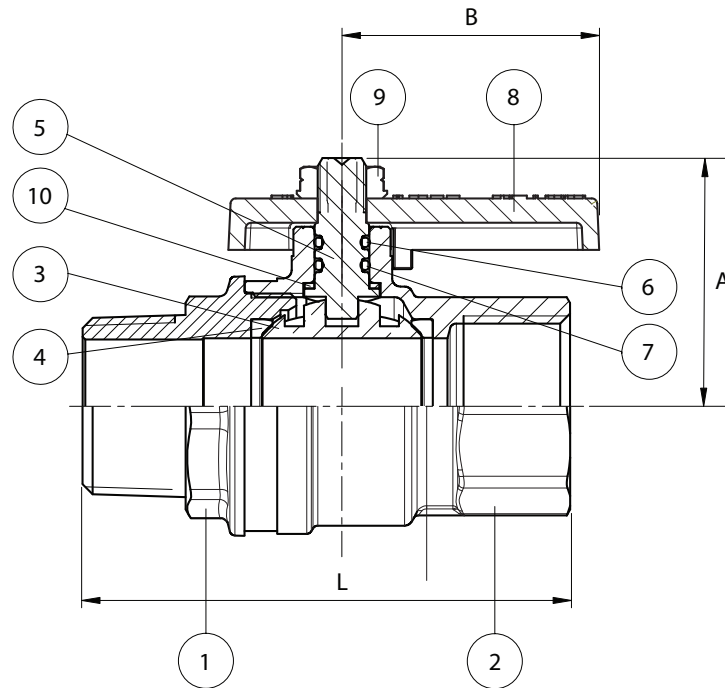

PARTS MATERIALS

POS.	PART	MATERIAL
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	STAINLESS STEEL 316
4	SEAL	PTFE
5	STEM	DZR BRASS
6	UPPER O-RING	HNBR
7	LOWER O-RING	EPDM PEROXIDE
8	HANDLE	DZR BRASS
9	NUT	DZR BRASS
10	THRUST WASHER	PTFE

DIMENSIONS (mm)

Prod. Code	DN	Size - (mm)	A	B	L	Kv	Wgt Kg
1014020	20	3/4" - (19)	41.7	47.3	78	28	0.380
1014025	25	1" - (25.4)	45.7	47.3	89	39	0.600

PRESSURE/TEMPERATURE GRAPH

