



Series 1245

**Zetco WaterMarked
DZR Brass
90° Ball Valve M&F
Lockable Handle**

DESCRIPTION

A 90° angle ball valve WaterMark approved to AS 4796 (Licence WM-022133) with both male and female threaded connections and a DZR brass body and stainless steel 316 grade ball for added resilience and reliable performance in civil water applications. The anti-vandal lever in DZR brass can be locked in either the open or closed for added safety and security.

FEATURES

Design	Forged dezincification resistant brass body Arrow on body to indicate flow direction Stainless steel 316 grade ball for superior corrosion resistance Lockable anti-vandal DZR brass lever handle for added security PTFE ball seals for smooth, reliable operation Blow-out proof stem to prevent leakage
Production	Manufactured in Italy under ISO 9001 Quality Management System All valves are pressure tested during production
Technical	Male ISO 7/1 R (BSP) threaded connection Female ISO 7/1 Rp (BSP) threaded connection Flow control: On/off only, not intended for throttling Temperature range: -20°C to 99°C Max. pressure: 2500 kPa (refer to graph)
Options & Variants	Size: DN20 (3/4") Series 1254 WaterMarked 90° angle BSP F&F s/steel ball lockable Series 1246 WaterMarked 90° angle BSP M&F lilac lockable Series 1250 WaterMarked 90° angle full lilac BSP M&F lockable Series 1263 WaterMarked 90° press-fit x BSP male lockable




WaterMark
IAPMO WM-022133
AS 4796

Series 1245

Zetco WaterMarked DZR Brass
90° Ball Valve M&F Lockable Handle



DIMENSIONAL AND COMPONENT DIAGRAM

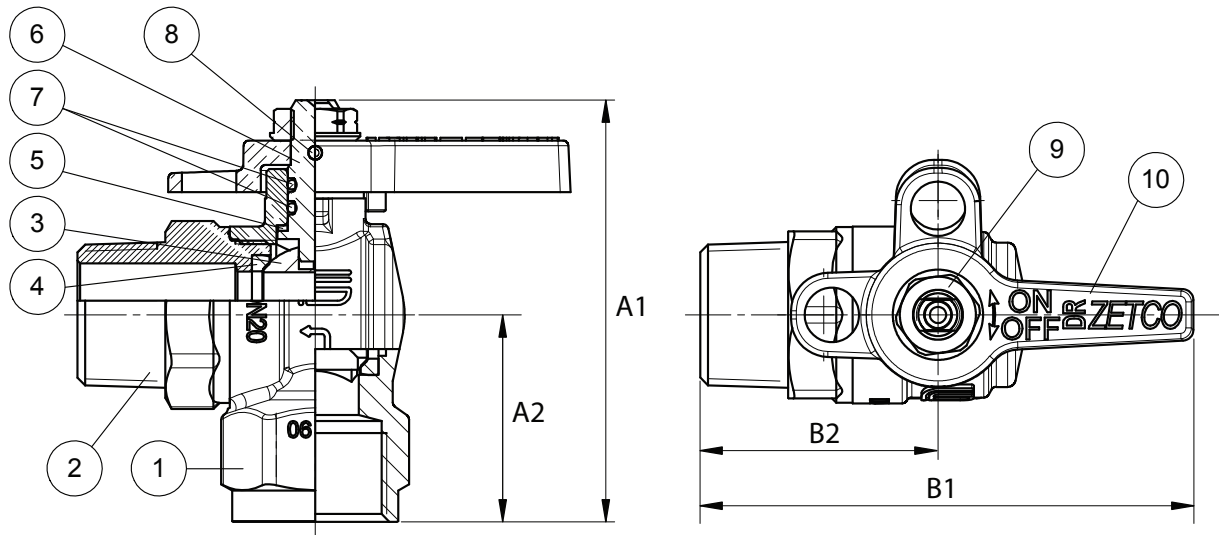

PARTS MATERIALS

POS.	PART	MATERIAL
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	STAINLESS STEEL 316
4	SEAL	PTFE
5	THRUST WASHER	PTFE
6	STEM	DZR BRASS
7	O-RINGS	EPDM PEROXIDE
8	LOCKING PIN	STAINLESS STEEL 316
9	NUT	DZR BRASS
10	HANDLE	DZR BRASS

DIMENSIONS (mm)

Prod. Code	DN	Size - (mm)	A1	A2	B1	B2	Wgt Kg
1245020	20	3/4" - (19.0)	70	38	91	44	0.346

PRESSURE/TEMPERATURE GRAPH

