



Series 1250

Zetco WaterMarked DZR Brass 90° Ball Valve Lilac M&F Lockable Lever

DESCRIPTION

A 90° DZR brass ball valve WaterMark approved to AS 4796 (Licence WM-022133) with a lilac body and handle to clearly identify a recycled water supply. The 316 grade stainless steel ball provides superior corrosion resistance while the tamper-proof DZR brass lockable lever handle can be locked either the open or closed position for added security and protection from vandalism.

FEATURES

Design	Forged dezincification resistant brass body Arrow on body to indicate flow direction Stainless steel 316 grade ball for superior corrosion resistance Lockable anti-vandal DZR brass lever handle for added security Permanent lilac colour coating complies with South Australian OTR Standard for dual reticulation infrastructure PTFE ball seals for smooth, reliable operation Blow-out proof stem to prevent leakage
Production	Manufactured in Italy under ISO 9001 Quality Management System All valves are pressure tested during production
Technical	Female ISO 7/1 Rp (BSP) threaded connection Loose nut: ISO 228/1 (BSPP) female parallel threaded connection Flow control: On/off only, not intended for throttling Temperature range: -20°C to 99°C Max. pressure: 2500 kPa (refer to graph)
Options & Variants	Size: DN20 (3/4") Series 1246 WaterMarked 90° angle BSP M&F lilac lockable Series 1249 WaterMarked 90° angle BSP female x flare lilac lockable Series 1242 WaterMarked 90° angle BSP F&F lilac lockable Series 1249 WaterMarked 90° angle BSP female x flare lilac lockable




WaterMark
IAPMO WM-022133
AS 4796

Series 1250

Zetco WaterMarked DZR Brass 90° Ball Valve
Lilac M&F Lockable Lever



DIMENSIONAL AND COMPONENT DIAGRAM

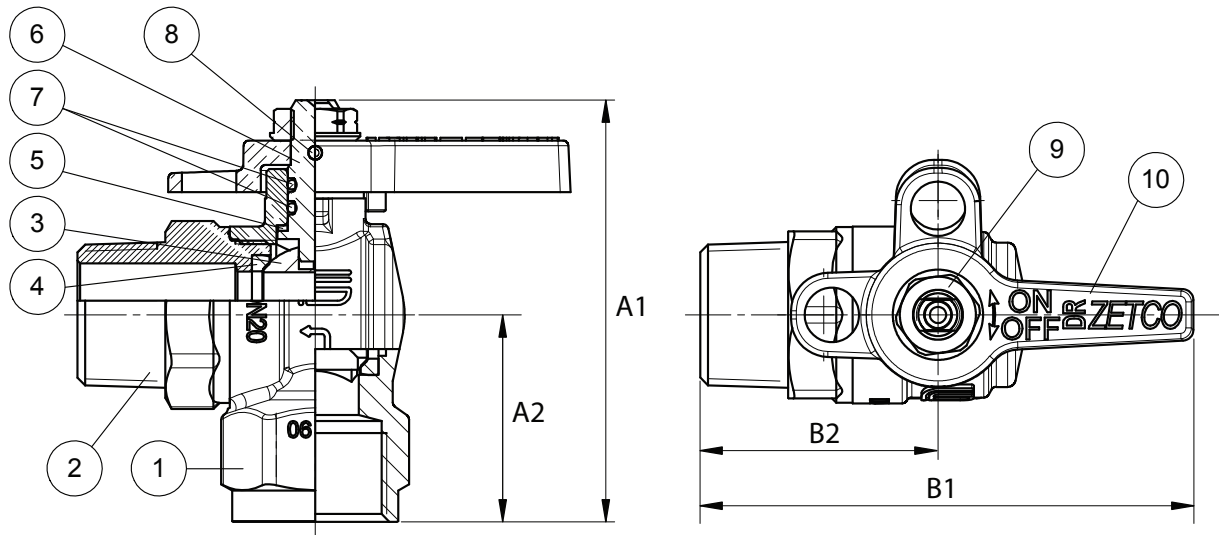

PARTS MATERIALS

POS.	PART	MATERIAL
1	BODY	DZR BRASS
2	END ADAPTOR	DZR BRASS
3	BALL	STAINLESS STEEL 316
4	SEAL	PTFE
5	THRUST WASHER	PTFE
6	STEM	DZR BRASS
7	O-RINGS	EPDM PEROXIDE
8	LOCKING PIN	STAINLESS STEEL 316
9	LEVER HANDLE	DZR BRASS
10	HANDLE NUT	DZR BRASS

DIMENSIONS (mm)

Prod. Code	DN	Size - (mm)	A1	A2	B1	B2	Kv	Wgt Kg
1250020	20	3/4" - (19.0)	70	38	91	44	16	0.373

PRESSURE/TEMPERATURE GRAPH

