



Series 1504

Zetco WaterMarked DZR Brass Y Strainer

DESCRIPTION

A female threaded DZR brass Y strainer WaterMark approved to AS 3688 (Licence WM-022217) which is ideal for straining potable water systems. The robust stainless steel 316 grade filter mesh ensures that undesirable debris carried in the media can be captured and easily removed to protect equipment and appliances downstream.

FEATURES

Design	Forged dezincification resistant brass body and cap Stainless steel 316 mesh for added durability EPDM peroxide o-ring for a tight seal to prevent leakage Arrow on body to indicate flow direction
Production	Manufactured in Italy under ISO 9001 Quality Management System All strainers are pressure tested during production
Technical	Female ISO 7/1 Rp (BSP) threaded connections Mesh size: 500 microns (other sizes available on request) Temperature range: -10°C to 110°C Max. pressure: 2500 kPa
Options & Variants	Size range: DN8 (1/4") to DN50 (2") Series 1524 WaterMarked bronze Y strainer F&F DN65-100 Series 1524 Non-WaterMarked bronze Y strainer F&F DN15-50 Series 1525 WaterMarked bronze Y strainer flanged Series 4060 Stainless steel Y strainer F&F Series 1020 WaterMarked combined ball valve and Y strainer

BIM-MED^{AUS}



WaterMark


IAPMO WM-022217
AS 3688

Series 1504

Zetco WaterMarked DZR Brass Y Strainer



DIMENSIONAL AND COMPONENT DIAGRAM

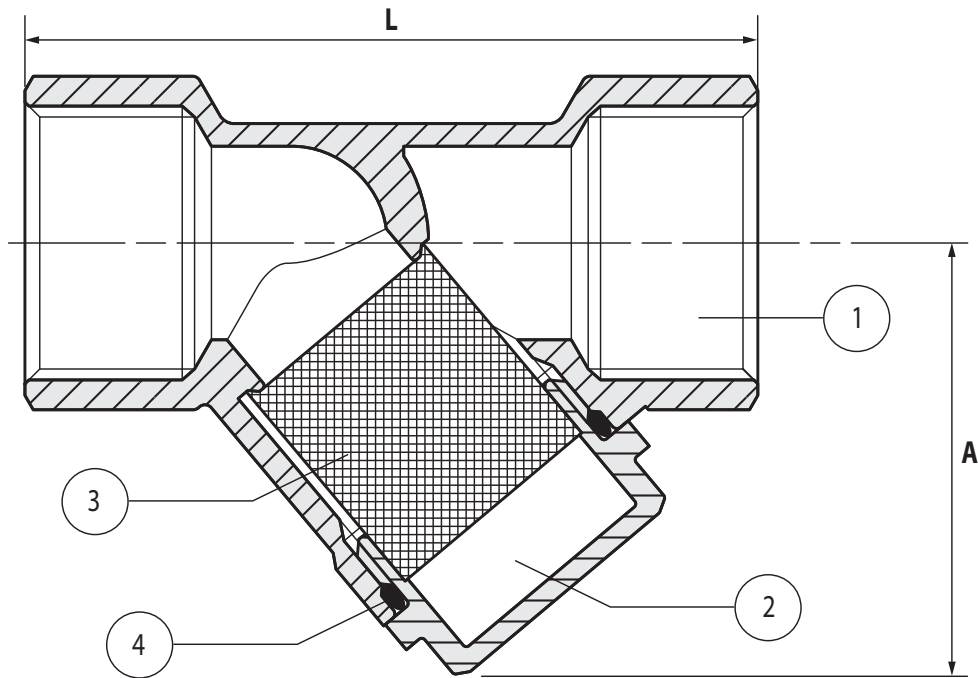

MATERIALS

POS.	PART	MATERIAL
1	BODY	DZR BRASS
2	CAP	DZR BRASS
3	MESH	STAINLESS STEEL 316
4	O-RING	EPDM PEROXIDE

DIMENSIONS (mm)

Prod. Code	DN	Size - (mm)	A	L	Kv	Wgt Kg
1504006	8	1/4" - (6.3)	39	54	1.9	0.215
1504010	10	3/8" - (9.5)	39	57	3.1	0.198
1504015	15	1/2" - (12.7)	39	67	4.1	0.189
1504020	20	3/4" - (19.0)	50	81	7.8	0.297
1504025	25	1" - (25.4)	55	97	10.0	0.468
1504032	32	1 1/4" - (31.7)	66	104	15.5	0.657
1504040	40	1 1/2" - (38.1)	75	118	20.6	0.971
1504050	50	2" - (50.8)	90	145	32.5	1.56