Retractable Clothes Line
Model No. 10-0712

www.asijdmacdonald.com.au freecall 1800 023 441 Date: May 2016




SPECIFICATION
Retractable Clothes Line shall have cord cover plate, locking nut and knob retainer fabricated of alloy 18-8 stainless steel, grade 304, with No. 4 satin finish. Mounting bracket shall be heavy duty zinc plated steel. Nylon gaskets shall be supplied to isolate flanges from finished wall surface. Unit shall have spring actuated reel with 1830mm minimum vinyl covered cord. Cord knob shall be white vinyl. Locking knurled nut to hold stretched line taut shall be provided on cord cover.


INSTALLATION
Surface mount cord cover plate mounting bracket and nylon disc to wall with two self tapping screws (supplied by others). Install cord cover plate over bracket and nylon disk. Secure cover plate in place by screwing the set screw in the top of the bracket. Surface mount knob retainer and oval nylon disc on opposite wall with two self tapping screws (supplied by others). For masonry walls, installer shall provide fiber plugs or expansion shields. For dry walls or plaster walls, installer shall provide concealed backing or toggle bolts to comply with local building codes and to suit wall conditions.


WARRANTY
One year.

OPERATION
Release the locking nut, grasp the vinyl cord knob and pull out a sufficient amount of clothes line to permit attaching the cord knob to the knob retainer. Tighten locking nut sufficiently to hold stretched line taught. The clothes line is retracted into the cover plate mechanism by first releasing the locking nut and then removing the cord knob from the knob retainer, thereby allowing the spring mechanism to automatically retract the clothes line.

Retractable Clothes Line shall be Model No. 10-0712 as supplied by ASI JD MacDonald.

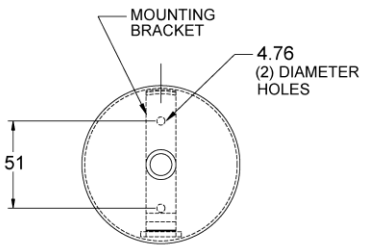

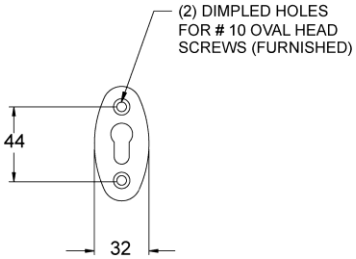

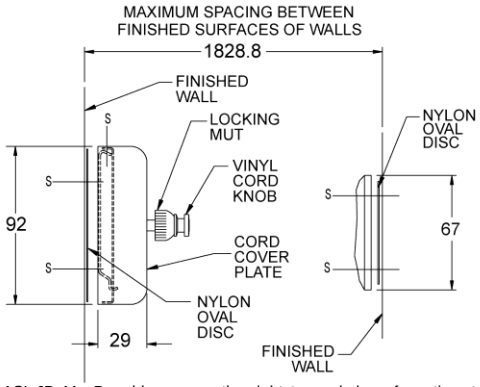

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres unless otherwise stated.