Security Recessed Shelf
Model No. 10-130

www.asijdmacdonald.com.au freecall 1800 023 441 Date: May 2019



SPECIFICATION

Security Recessed Shelf shall be fabricated of 18-8 alloy stainless steel, type 304, No 16 gauge. All exposed surfaces shall have No 4 satin finish. Interior shall be 4" (102mm) deep and shall have glass blasted satin matte finish. All corners shall be welded and ground smooth. Back of shelf shall be provided with four (4) welded-on anchor nuts that accept threaded studs (supplied). Back plate shall be fabricated of die-formed galvanized steel No 11 gauge and shall be reversible for shallow or deep wall installation. Back plate shall be provided with four (4) welded-on threaded posts to receive threaded rods of length specified at tie of order and shall be equipped with four (4) washers and nuts.

INSTALLATION

Mount unit through wall opening and secure to finished wall by adjusting threaded rods (supplied) to accommodate wall thickness. The length of the threaded rods is determined by the thickness of the wall on which the shelf is mounted. Specify the thickness of the wall in the following increments (e.g. 130-LT4). For Accessible WC's refer to Australian Standards AS1428.1-2009

Wall Thickness	**Suffix**
Up to 120mm	LT4
120mm to 152mm	46
153mm specify thickness:	GR6=xxx


Rough Wall Opening (RWO)
141mm x 419mm

OPERATION
Various items can be stored in the 102mm deep interior of the shelf.

WARRANTY
One year

Recessed Toilet Paper Holder shall be Model No 10-130 as supplied by ASI JD MacDonald.

All ASI JD MacDonald disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

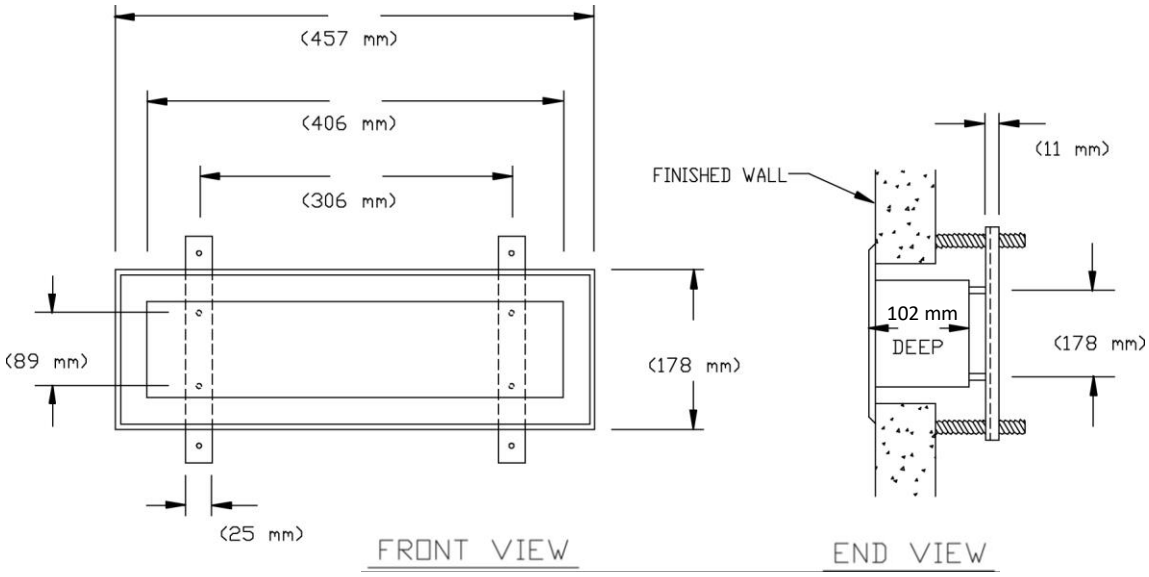

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres unless otherwise stated.